

*liper*

2019.04



GERMANY LIPER



*liper*®

GERMANY LIPER

Established in Germany in 1912...



**LED**

GERMANY LIPER ELECTRICAL CO., LTD

ZHEJIANG LIPER LIGHTING TECHNOLOGY CO., LTD

Add: No.233 Haitang Road, the15<sup>th</sup> Road, Binhai Eco & Tech  
Development Zone, wenzhou City, Zhejiang Province, China

TEL: +86-577-8682 7777 86-577-8682 5888


FAX: +86-577-8681 5838

E-mail: webmaster@liper.com

[www.liper.eu](http://www.liper.eu)  
[www.liper.cn](http://www.liper.cn)



 **BX SERIES**  
**LED DOWN LIGHT**

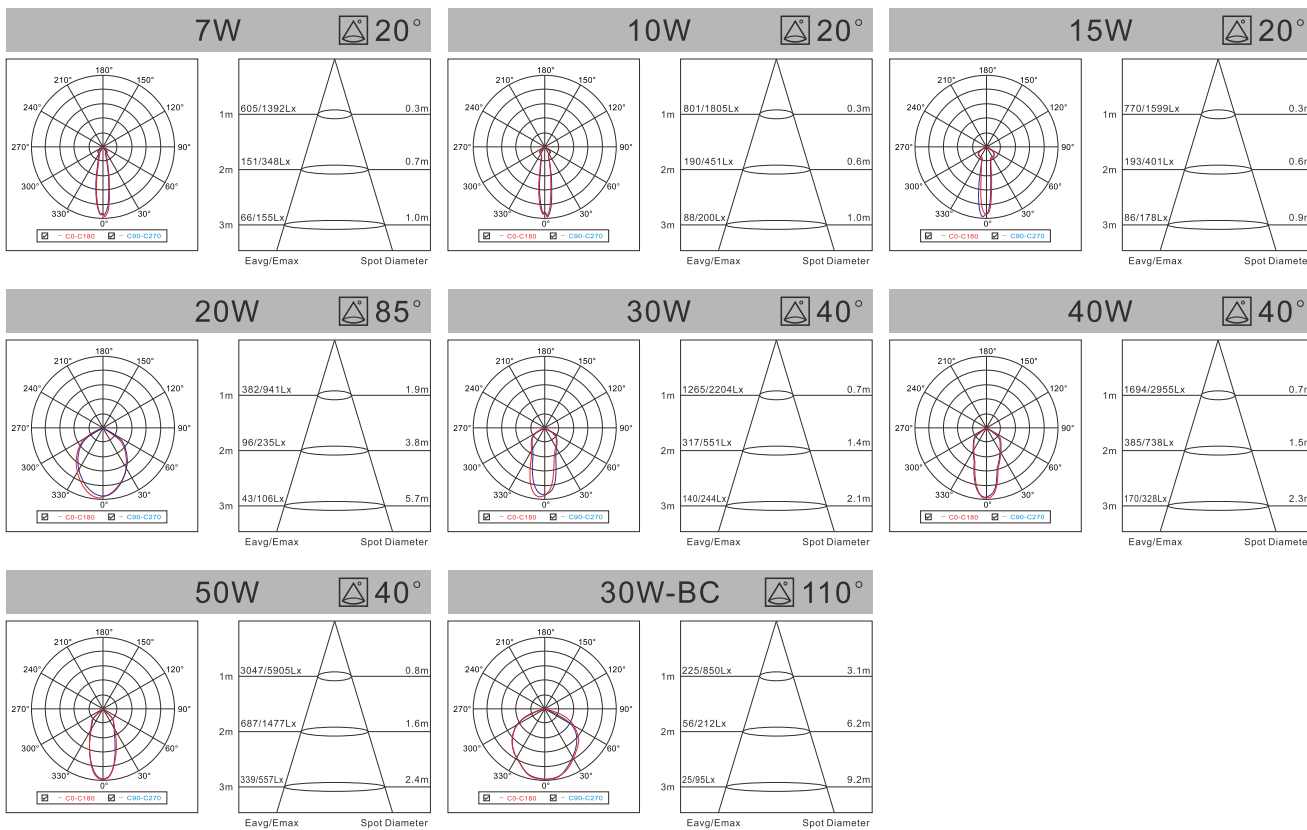

**Material**  
High Quality Aviation Aluminum

**Color Temperature**  
 Warm White  
 Cool White  
 Natural White

**LED DOWN LIGHT**

AC:100/220-240V CRI $\geq$ 80 H:30000h




Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product size	Lochgröße Cutout
LP-COB07BX01	● 7W	550-650LM	N	Ø 98x46mm	Ø 75-85mm
LP-COB10BX01	● 10W	850-950LM	N	Ø 115x47mm	Ø 95-105mm
LP-COB15BX01	● 15W	1350-1450LM	N	Ø 140x49mm	Ø 120-130mm





Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product size	Lochgröße Cutout
LP-COB20BX01	● 20W	1750-1900LM	N	Ø 160x50mm	Ø 130-150mm
LP-COB30BX01	● 30W	2550-2650LM	N	Ø 196x60mm	Ø 160-185mm
LP-COB40BX01	● 40W	3450-3550LM	N	Ø 225x70mm	Ø 180-215mm
LP-COB50BX01	● 50W	4350-4450LM	N	Ø 225x95mm	Ø 180-215mm

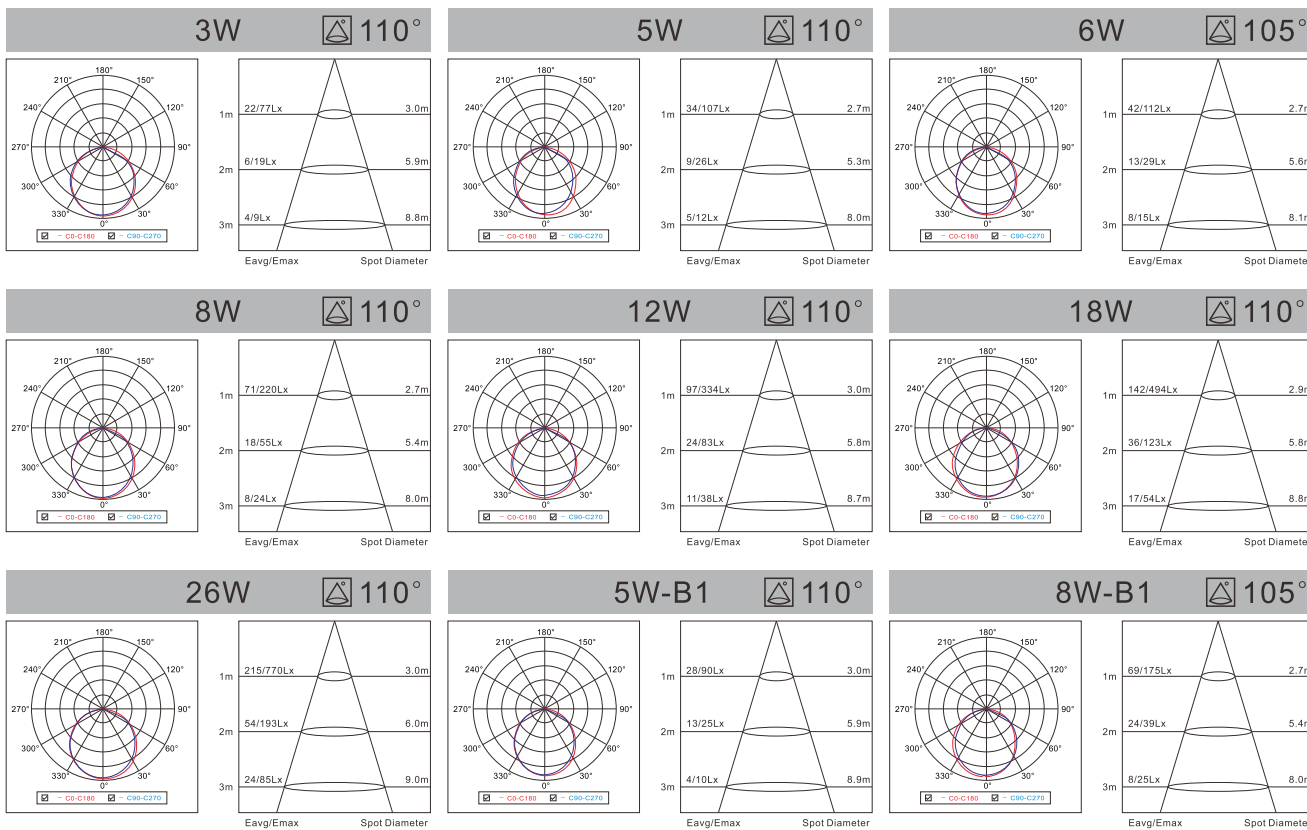

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product size	Lochgröße Cutout
LP-COB30BC-01	● 30W	2650-2850LM	N	Ø 228x44mm	Ø 205-215mm



**Material**  
High Quality Aviation Aluminum

**Color Temperature**  
 Warm White 
 Cool White 
 Natural White 

**LED DOWN LIGHT**

AC:220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product size	Lochgröße Cutout
LP-DL03EW03-Y1	● 3W	210-240LM	N	∅ 98x28mm	∅ 70-90mm
LP-DL05EW03-Y1	● 5W	360-420LM	N	∅ 98x28mm	∅ 70-90mm
LP-DL06EW03-Y1	● 6W	430-510LM	N	∅ 120x28mm	∅ 90-110mm
LP-DL08EW03-Y1	● 8W	560-650LM	N	∅ 146x28mm	∅ 115-130mm
LP-DL12EW03-Y1	● 12W	880-1020LM	N	∅ 185x28mm	∅ 155-175mm
LP-DL18EW03-Y1	● 18W	1450-1530LM	N	∅ 225x28mm	∅ 195-215mm
LP-DL26EW03-Y1	● 26W	2110-2210LM	N	∅ 225x28mm	∅ 195-215mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product size	Lochgröße Cutout
LP-DL05EW03-B1	● 5W	360-420LM	N	∅ 120x35mm	∅ 70-90mm
LP-DL08EW03-B1	● 8W	560-650LM	N	∅ 146x35mm	∅ 90-110mm





LIPER MAKE THE WORLD MORE ENERGY SAVING! LIPER MAKE THE WORLD MORE ENERGY SAVING!






**LED WATERPROOF DOWN LIGHT** AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product size
LP-DL20MA01-Y	● 20W	1600-1700LM	N	∅ 182X48mm
LP-DL30MA01-Y	● 30W	2400-2500LM	N	∅ 235X52mm
LP-DL40MA01-Y	● 40W	3200-3300LM	N	∅ 292X55mm
LP-DL20MA01-YG(SENSOR)	● 20W	1600-1700LM	N	∅ 182X48mm
LP-DL30MA01-YG(SENSOR)	● 30W	2400-2500LM	N	∅ 235X52mm
LP-DL40MA01-YG(SENSOR)	● 40W	3200-3300LM	N	∅ 292X55mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product size
LP-DL30MA01-F	● 30W	2400-2500LM	N	215x215x48mm
LP-DL40MA01-F	● 40W	3200-3300LM	N	265x265x55mm
LP-DL30MA01-FG(SENSOR)	● 30W	2400-2500LM	N	215x215x48mm
LP-DL40MA01-FG(SENSOR)	● 40W	3200-3300LM	N	265x265x55mm

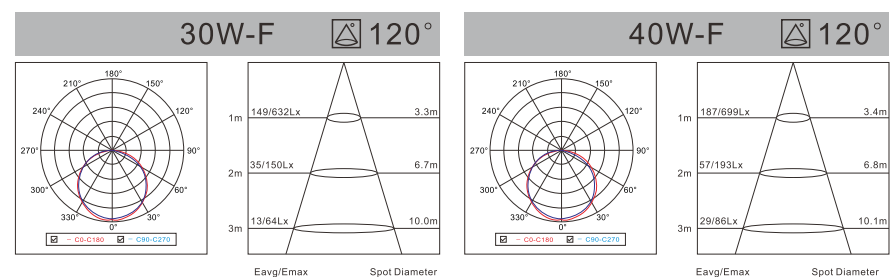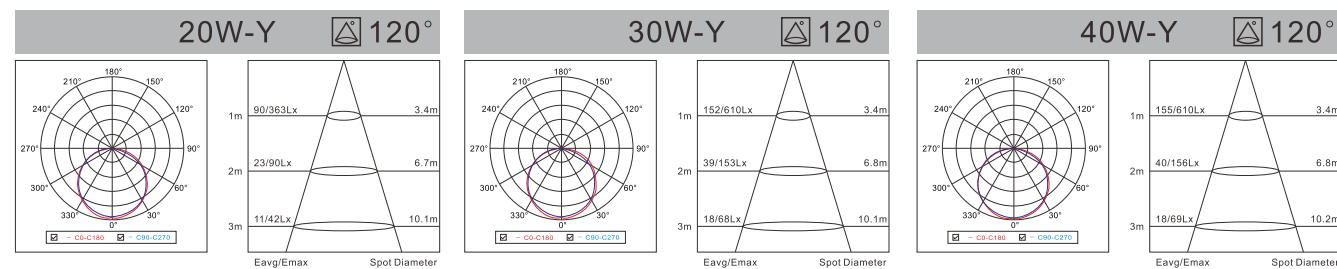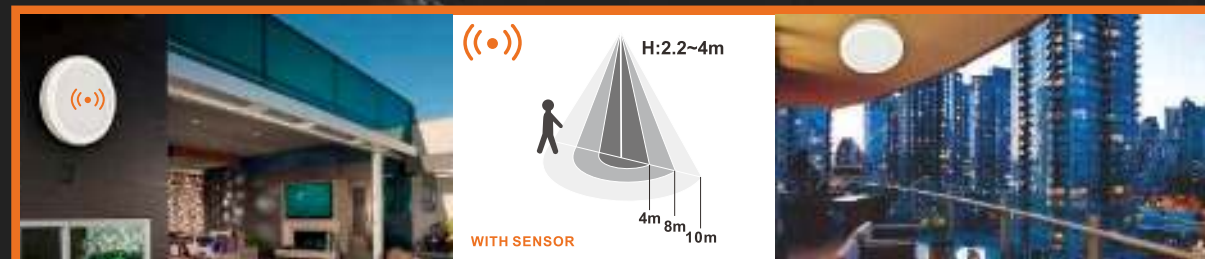

**IP65 LED DOWNLIGHT**  
20W / 30W / 40W







M SERIES  
LED FLOOD LIGHT



400W

LIPER LIGHTING

400W

LIPER LIGHTING

400W

LIPER LIGHTING

# LED FLOOD LIGHT

Long Lifetime High Lumen Efficiency High CRI  
Good Heat Dissipation No Radiation Energy Saving

IP65

50W/100W/150W/200W/250W/400W//500W/600W








# M SERIES LED FLOOD LIGHT

IP66

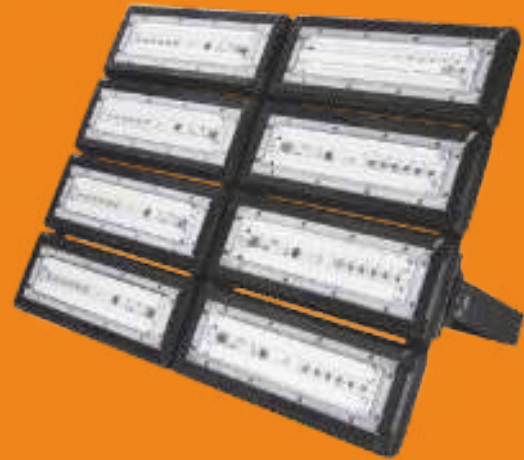

M02

## LED FLOOD LIGHT


AC:220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product size
LPFL-50M01	● 50W	4980-5120LM	N	295X70X138mm
LPFL-100M01	● 100W	10560-11380LM	N	295X70X268mm
LPFL-150M01	● 150W	14800-15500LM	N	298X73X378mm
LPFL-200M01	● 200W	20800-21500LM	N	298X73X490mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product size
LPFL-300M01	● 300W	28900-29600LM	N	573X73X378mm
LPFL-400M01	● 400W	39500-40200LM	N	573X73X490mm
LPFL-500M01	● 500W	48600-49700LM	N	573X73X600mm
LPFL-600M01	● 600W	58800-59500LM	N	573X73X700mm

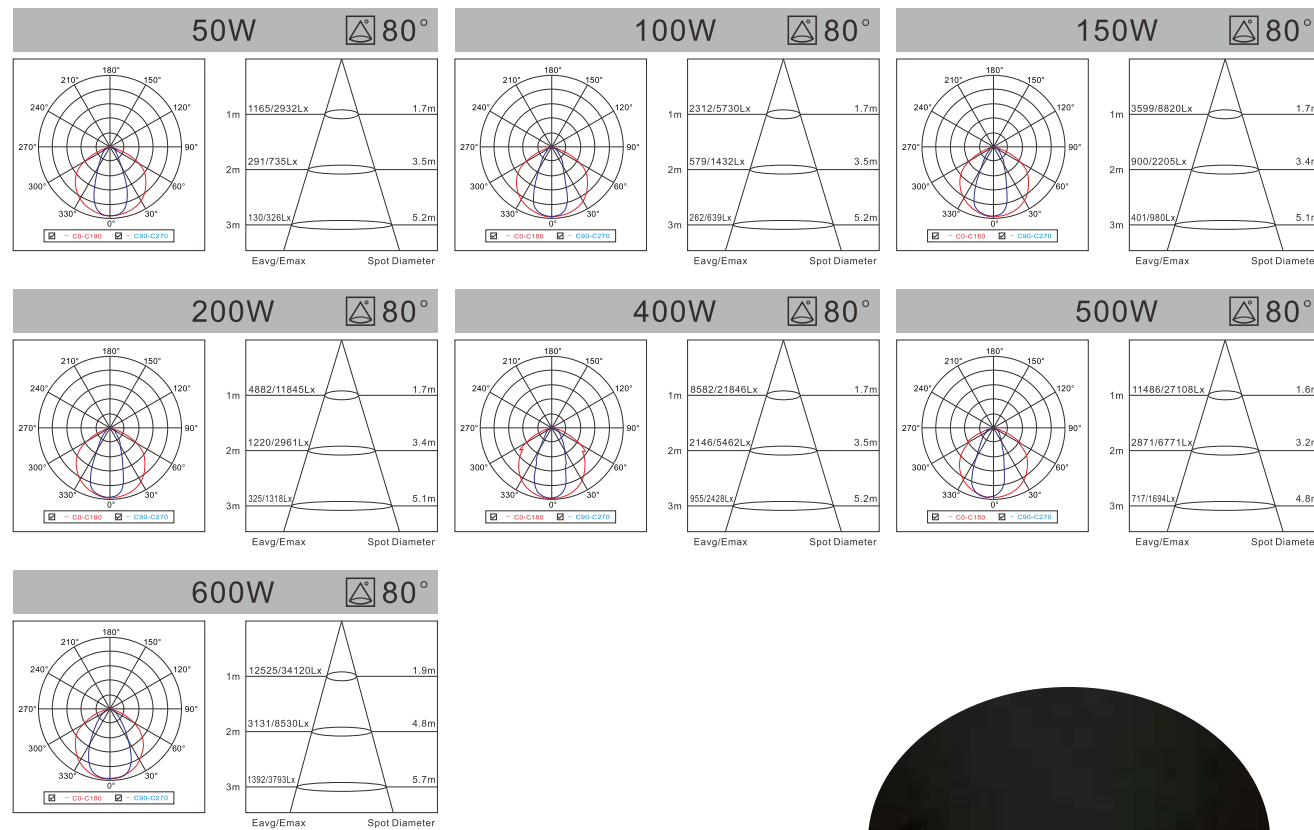


Material

High Quality Aviation Aluminum

Color Temperature





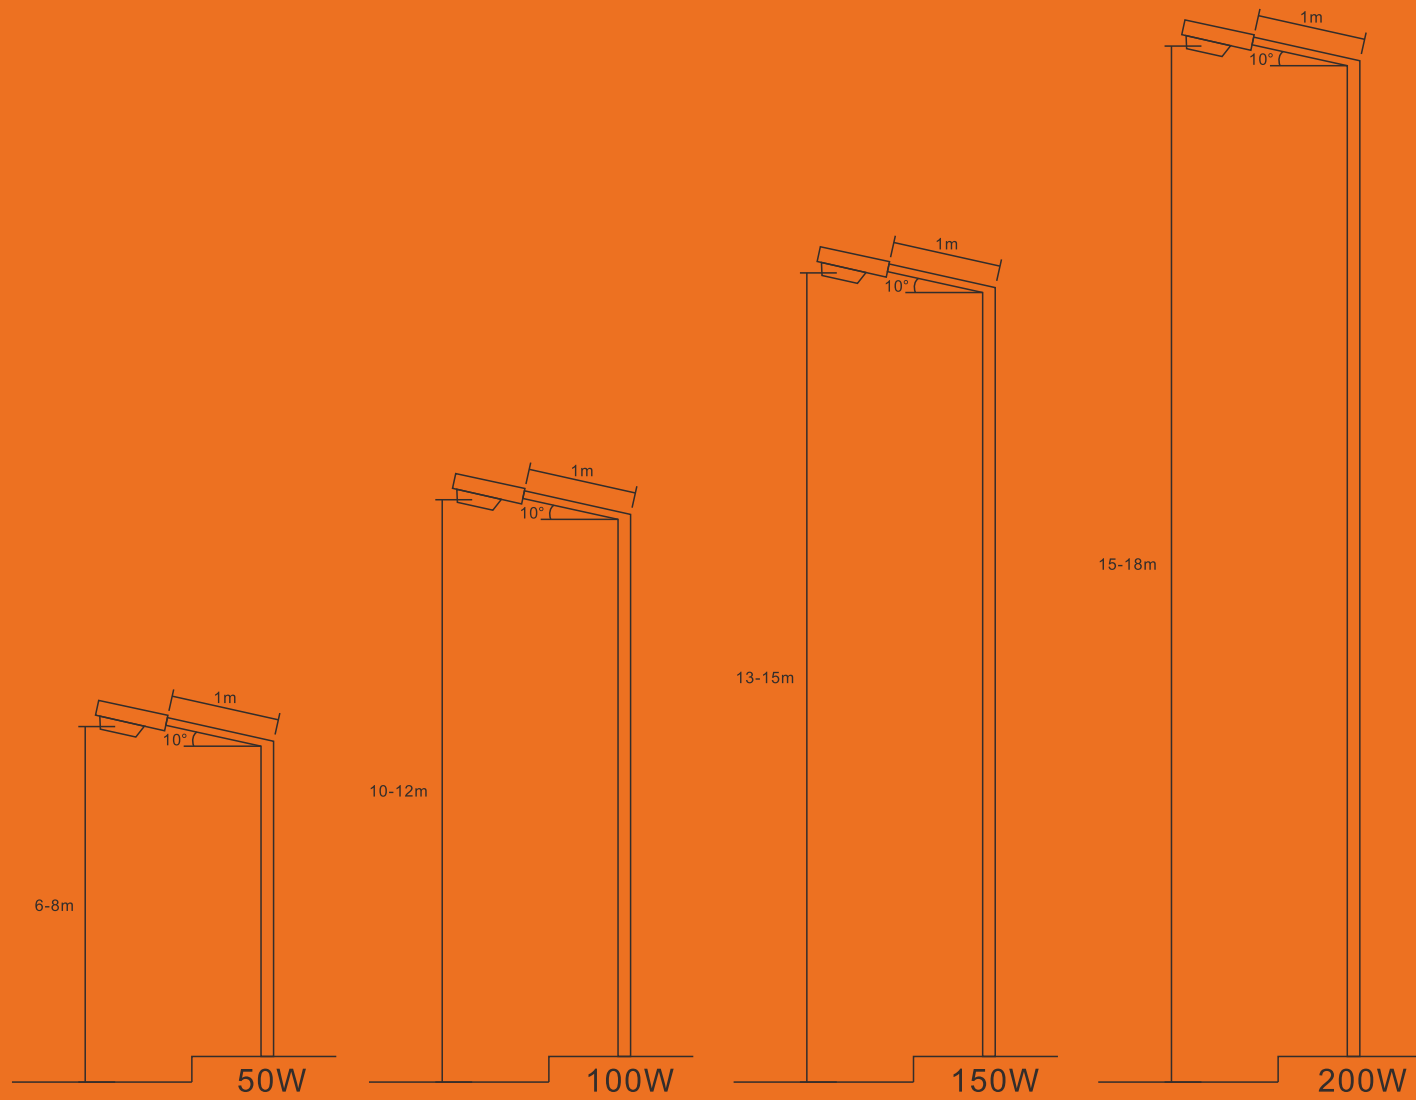

**IP65**



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product size	Rohrdurchmesser einbauen Installation Pipe Diameter
LPSTL-50A01	● 50W	3800-4360LM	N	373X300X80mm	∅ 50/60mm
LPSTL-100A01	● 100W	9200-9560LM	N	565X300X80mm	∅ 50/60mm
LPSTL-150A01	● 150W	12600-13350LM	N	757X300X80mm	∅ 50/60mm
LPSTL-200A01	● 200W	17500-18200LM	N	950X300X80mm	∅ 50/60mm

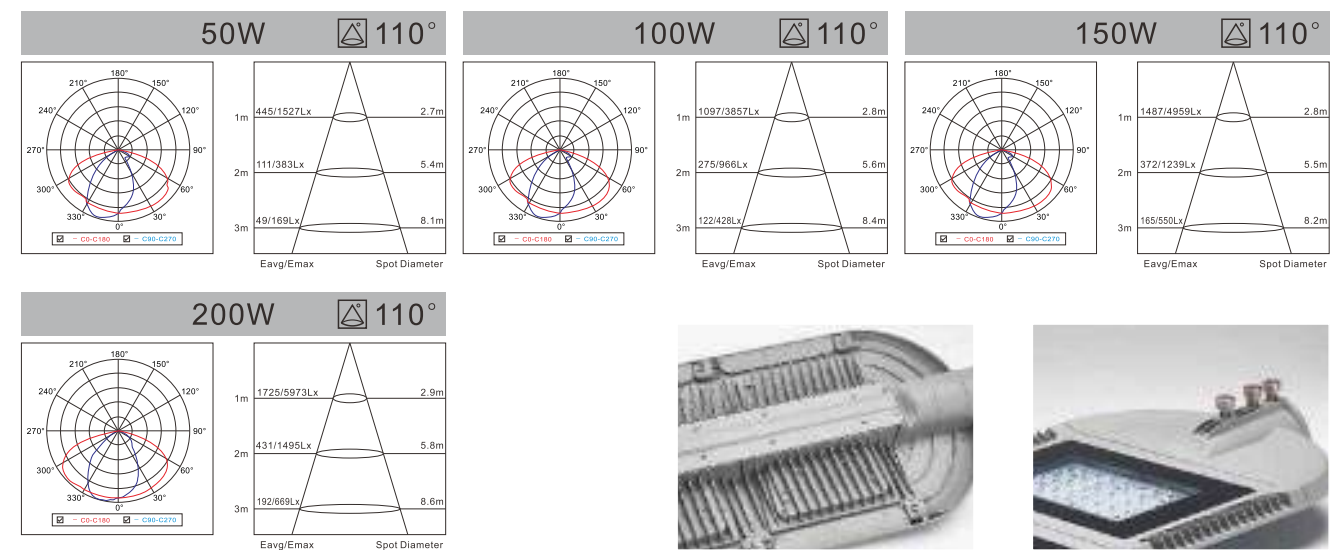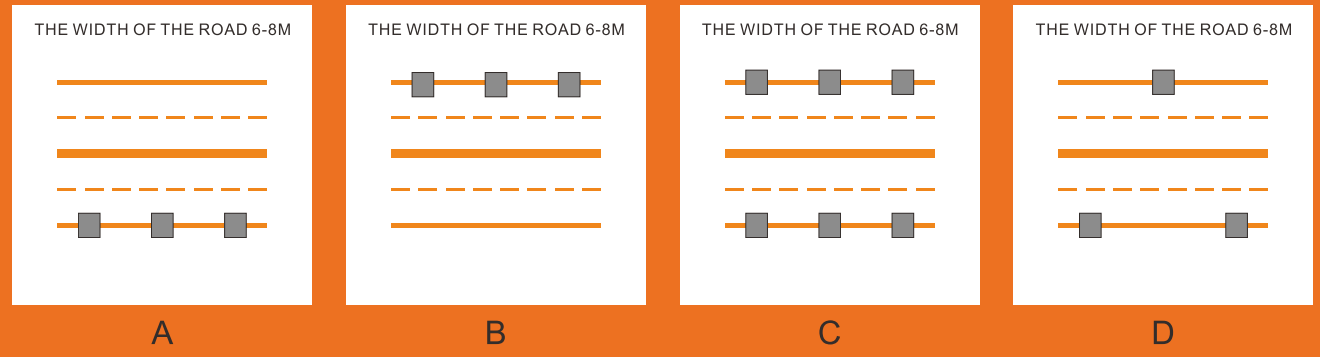

	RECOMMENDED SPACING OF STREET LIGHTS				ROAD REFERENCE DATASHEET				
	A	B	C	D	Lm(cd/m²)	Uo	U1	TI[%]	EIR
50W	18-21m	18-21m	30-36m	32-38m	≥0.75	≥0.40	≥0.60	≤15	≥0.30
100W	30-36m	30-36m	52-68m	57-63m					
150W	42-48m	42-48m	57-63m	57-63m					
200W	45-51m	45-51m	57-63m	57-63m					







**B SERIES**  
**LED UFO LIGHT**



**100W/200W**  
**LED UFO LIGHT**  
HIGH ENERGY SAVING  
BETTER ILLUMINANCE  
MORE ARTISTIC  
IP65



FACTORY



WAREHOUSE




SUPERMARKET



RESTAURANT

**FRESH LIGHT FOR SUPERMARKET**

Ra>90(AVERAGE OF R1-R8)  
R9>0(OBJECT MORE COLORFUL)

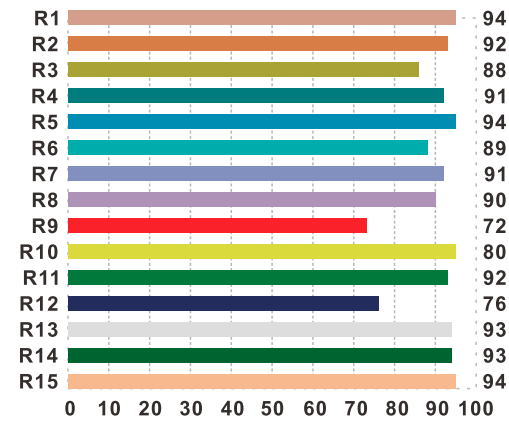

\* TAKE 100W AS REFERENCE






 **B SERIES**  
**LED UFO LIGHT**

**LED UFO LIGHT**

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product size
LPUF-100B01	● 100W	8750-8970LM	N	Ø 265X130mm
LPUF-200B01	● 200W	18380-18650LM	N	Ø 375X125mm

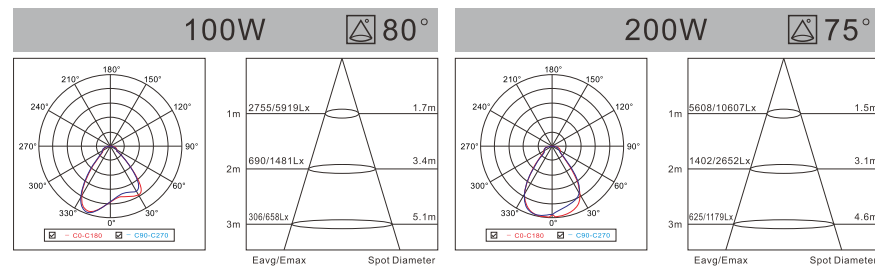

**Material**

High Quality Aviation Aluminum

**Color Temperature**



 **B-C SERIES**  
**LED HIGH BAY LIGHT**

**LED HIGH BAY LIGHT**

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product size
LPHB-100C01	● 100W	8890-9230LM	N	Ø 335X253mm
LPHB-150C01	● 150W	13650-14100LM	N	Ø 335X253mm
LPHB-200C01	● 200W	17200-18100LM	N	Ø 335X253mm
LPHB-300C01	● 300W	26500-27300LM	N	Ø 335X253mm
LPHB-100C02	● 100W	8890-9230LM	N	Ø 335X253mm
LPHB-150C02	● 150W	13650-14100LM	N	Ø 335X253mm
LPHB-200C02	● 200W	17200-18100LM	N	Ø 335X253mm
LPHB-300C02	● 300W	26500-27300LM	N	Ø 335X253mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product size
LPHB-50B01	● 50W	3800-4360LM	N	Ø 415X340mm
LPHB-70B01	● 70W	4800-5280LM	N	Ø 415X340mm
LPHB-100B01	● 100W	7550-8230LM	N	Ø 415X340mm
LPHB-150B01	● 150W	12300-12680LM	N	Ø 415X345mm
LPHB-200B01	● 200W	15670-16090LM	N	Ø 470X375mm









# A/E SERIES LED LOUVER FITTING

## LED LOUVER FITTING

AC:100/220-240V CRI≥80 H:30000h

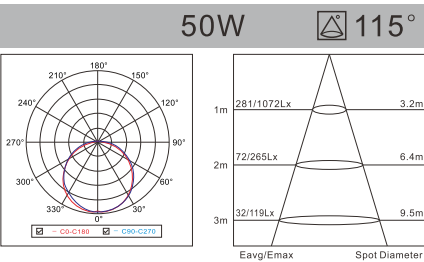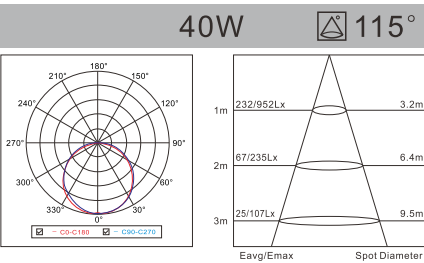


Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product size
LP-LF60E60 40W	● <b>40W</b>	3250-3370LM	N	596X596X40mm
LP-LF60E60 50W	● <b>50W</b>	4380-4510LM	N	596X596X40mm

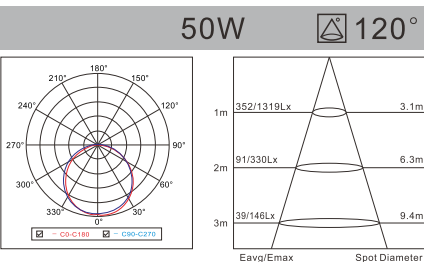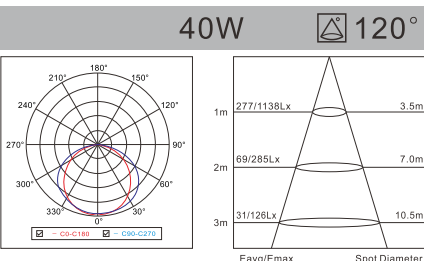


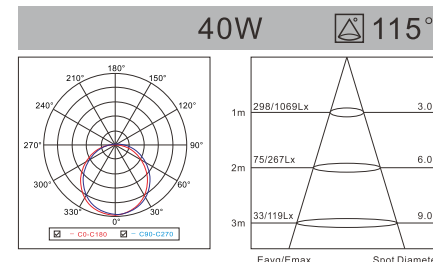
Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product size
LP-LF60A60 40W	● <b>40W</b>	3680-3960LM	N	596x596x7mm
LP-LF60A60 50W	● <b>50W</b>	4780-4950LM	N	596x596x7mm
LP-LF120A30	● <b>40W</b>	3680-3960LM	N	1196x296x7mm
LP-LF120A60	● <b>80W</b>	7350-7580LM	N	1196x596x7mm


## LED LOUVER FITTING

AC:100/220-240V CRI≥80 H:30000h

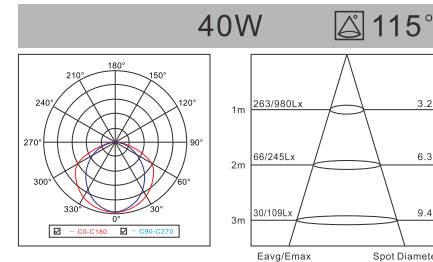

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product size	Lochgröße Cutout
LED.CY.F 40W	● <b>40W</b>	3600-4000LM	N	596x596x56mm	 Ø 577x577mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product size	Lochgröße Cutout
LED.LJ.F6030 20W	● <b>20W</b>	1200-1300LM	N	596x296x56mm	 Ø 577x277mm
LED.LJ.F6060 40W	● <b>40W</b>	3600-4000LM	N	596x596x56mm	 Ø 577x577mm









# T5 SERIES LED TUBE




Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product size
LPTL04D05	● 4W	360-410LM	N	300x23x35mm
LPTL08D05	● 8W	720-820LM	N	600x23x35mm
LPTL12D05	● 12W	1050-1200LM	N	900x23x35mm
LPTL16D05	● 16W	1400-1610LM	N	1200x23x35mm

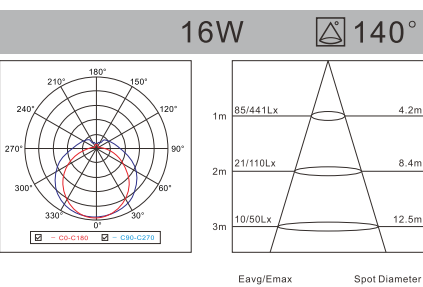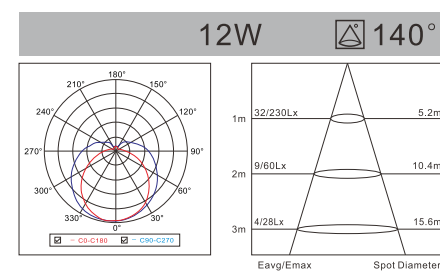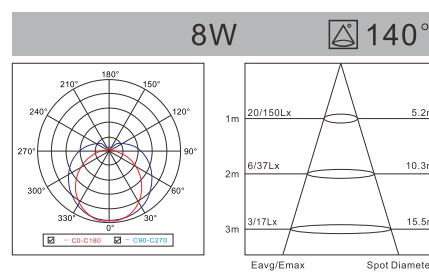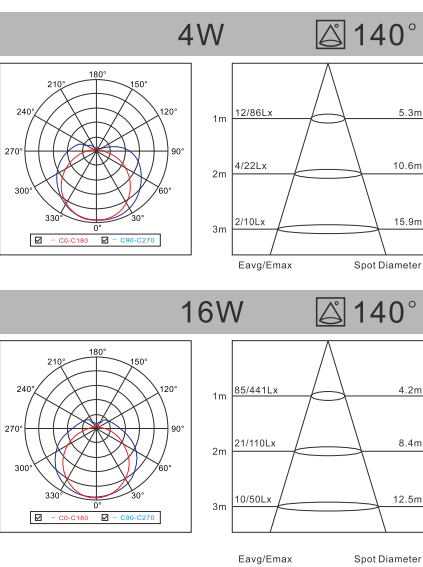


## LED TUBE

AC:100/220-240V CRI≥80 H:30000h

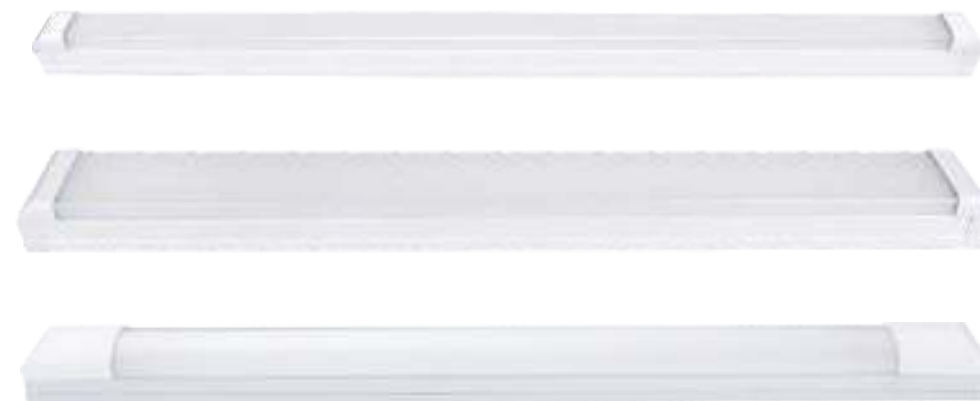


Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product size
LPTL08D04	● 8W	600-680LM	N	600x37x30mm
LPTL16D04	● 16W	1260-1350LM	N	1200x37x30mm
LPTL10D04-2	● 16W	1260-1350LM	N	600x37x63mm
LPTL20D04-2	● 32W	2550-2670LM	N	1200x37x63mm
LPTL30D04-2	● 62W	4960-5090LM	N	1500x37x63mm
LPTL10DS04-2	● 18W	1420-1530LM	N	588x36x56mm
LPTL20DS04-2	● 36W	2880-2950LM	N	1198x36x56mm
LPTL30DS04-2	● 45W	3750-3870LM	N	1498x36x56mm


8W-LPTL08D04

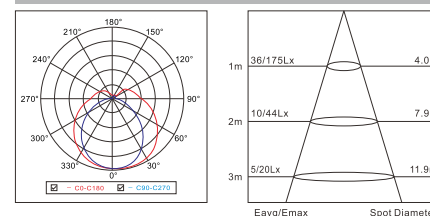


16W-LPTL16D04

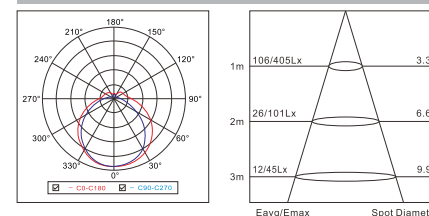


16W-LPTL10D04-2

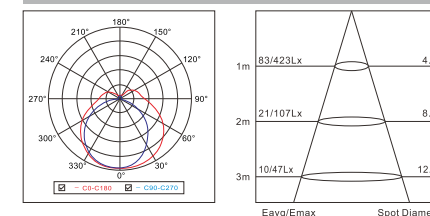


32W-LPTL20D04-2

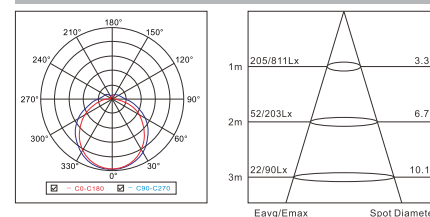

18W-LPTL10DS04-2

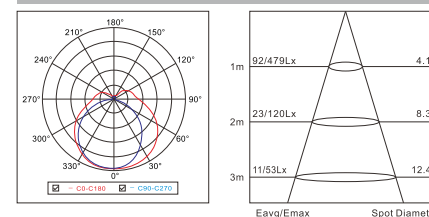

36W-LPTL20DS04-2

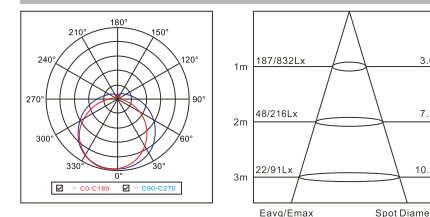

straight connection



"I" shape connector



Right angle connection



"L" shape connector